

The tables set out below relate to conditions 37 and 44 of Planning Permission 2012/1472 and should also be read in conjunction with the attached Guidance Notes

Table 1 - Between 07:00 and 23:00 - Noise level dB L_{A90, 10-minute}

Location (easting, northing grid coordinates)	Standardised wind speed at 10 metres height (m/s) within the site averaged over 10-minute periods											
	1	2	3	4	5	6	7	8	9	10	11	12
	L _{A90} Decibel Levels											
Property on Linden Grove (463182, 342279)	45	45	45	46	46	46	46	47	47	47	47	48
Property on Nottingham Road (463866, 343151)	45	45	46	47	47	48	48	49	50	50	51	51
Property at Millfield Close (464312, 343222)	47	48	48	49	50	51	52	53	54	54	55	56
The Holmes (465123, 343128)	38	40	41	42	44	45	46	47	49	50	51	53
Public House on Stoke Lane (464699, 342121)	44	45	46	46	47	48	49	49	50	51	52	52
Top Row (463903, 341513)	46	47	47	48	49	50	51	52	52	53	54	55

Table 2 - Between 23:00 and 07:00 - Noise level dB L_{A90, 10-minute}

Location (easting, northing grid coordinates)	Standardised wind speed at 10 metres height (m/s) within the site averaged over 10-minute periods											
	1	2	3	4	5	6	7	8	9	10	11	12
	L _{A90} Decibel Levels											
Property on Linden Grove (463182, 342279)	43	43	43	43	43	43	43	43	43	43	43	43
Property on Nottingham Road (463866, 343151)	43	43	43	43	43	43	43	43	43	43	43	43
Property at Millfield Close (464312, 343222)	43	43	43	43	43	44	45	46	48	49	49	49
The Holmes (465123, 343128)	43	43	43	43	43	43	43	44	45	46	46	46
Public House on Stoke Lane (464699, 342121)	44	45	45	46	46	47	48	48	49	49	49	49
Top Row (463903, 341513)	46	47	47	47	48	48	49	49	49	50	50	50

Note to Tables 1 & 2: The geographical coordinates references set out in these tables are provided for the purpose of identifying the general location of dwellings to which a given set of noise limits applies. The standardised wind speed at 10 metres height within the site refers to wind speed at 10 metres height derived from those measured at hub height, calculated in accordance with the method given in the attached Guidance Notes.

Guidance Notes for Noise Conditions

These notes are to be read with and form part of the noise condition. They further explain the condition and specify the methods to be employed in the assessment of complaints about noise immissions from the wind farm. The rating level at each integer wind speed is the arithmetic sum of the wind farm noise level as determined from the best-fit curve described in Guidance Note 2 of these Guidance Notes and any tonal penalty applied in accordance with Guidance Note 3. Reference to ETSU-R-97 refers to the publication entitled "The Assessment and Rating of Noise from Wind Farms" (1997) published by the Energy Technology Support Unit (ETSU) for the Department of Trade and Industry (DTI).

Guidance Note 1

(a) Values of the $L_{A90,10 \text{ minute}}$ noise statistic should be measured at the complainant's property, using a sound level meter of EN 60651/BS EN 60804 Type 1, or BS EN 61672 Class 1 quality (or the equivalent UK adopted standard in force at the time of the measurements) set to measure using the fast time weighted response as specified in BS EN 60651/BS EN 60804 or BS EN 61672-1 (or the equivalent UK adopted standard in force at the time of the measurements). This should be calibrated in accordance with the procedure specified in BS 4142: 1997 (or the equivalent UK adopted standard in force at the time of the measurements). Measurements shall be undertaken in such a manner to enable a tonal penalty to be applied in accordance with Guidance Note 3.

(b) The microphone should be mounted at 1.2 – 1.5 metres above ground level, fitted with a two-layer windshield or suitable equivalent approved in writing by the Local Planning Authority, and placed outside the complainant's dwelling. Measurements should be made in "free field" conditions. To achieve this, the microphone should be placed at least 3.5 metres away from the building facade or any reflecting surface except the ground at the approved measurement location. In the event that the consent of the complainant for access to his or her property to undertake compliance measurements is withheld, the wind farm operator shall submit for the written approval of the Local Planning Authority details of the proposed alternative representative measurement location prior to the commencement of measurements and the measurements shall be undertaken at the approved alternative representative measurement location.

(c) The $L_{A90,10 \text{ minute}}$ measurements should be synchronised with measurements of the 10-minute arithmetic mean wind and operational data logged in accordance with Guidance Note 1(d), including the power generation data from the turbine control systems of the wind farm.

(d) To enable compliance with the conditions to be evaluated, the wind farm operator shall continuously log arithmetic mean wind speed in metres per second and wind direction in degrees from north at hub height for each turbine and arithmetic mean power generated by each turbine, all in successive 10-minute periods. Unless an alternative procedure is previously agreed in writing with the Planning Authority, this hub height wind speed, averaged across all operating wind turbines, shall be used as the basis for the analysis. All 10 minute arithmetic average mean wind speed data measured at hub height shall be 'standardised' to a reference height of 10 metres as described in ETSU-R-97 at page 120 using a reference roughness length of 0.05 metres. It is this standardised 10 metre height wind speed data, which is correlated with the noise measurements determined as valid in accordance with Guidance Note 2, such correlation to be undertaken in the manner described in Guidance Note 2. All 10-minute periods shall commence on the hour and in 10- minute increments thereafter.

(e) Data provided to the Local Planning Authority in accordance with the noise condition shall be provided in comma separated values in electronic format.

(f) A data logging rain gauge shall be installed in the course of the assessment of the levels of noise immissions. The gauge shall record over successive 10-minute periods synchronised with the periods of data recorded in accordance with Note 1(d).

Guidance Note 2

(a) The noise measurements shall be made so as to provide not less than 20 valid data points as defined in Guidance Note 2 (b)

(b) Valid data points are those measured in the conditions specified in the agreed written protocol under paragraph (d) of the noise condition, but excluding any periods of rainfall measured in the vicinity of the sound

level meter. Rainfall shall be assessed by use of a rain gauge that shall log the occurrence of rainfall in each 10 minute period concurrent with the measurement periods set out in Guidance Note 1. In specifying such conditions the Local Planning Authority shall have regard to those conditions which prevailed during times when the complainant alleges there was disturbance due to noise or which are considered likely to result in a breach of the limits.

(c) For those data points considered valid in accordance with Guidance Note 2(b), values of the $L_{A90,10 \text{ minute}}$ noise measurements and corresponding values of the 10- minute wind speed, as derived from the standardised ten metre height wind speed averaged across all operating wind turbines using the procedure specified in Guidance Note 1(d), shall be plotted on an XY chart with noise level on the Y-axis and the standardised mean wind speed on the X-axis. A least squares, "best fit" curve of an order deemed appropriate by the independent consultant (but which may not be higher than a fourth order) should be fitted to the data points and define the wind farm noise level at each integer speed.

Guidance Note 3

(a) Where, in accordance with the approved assessment protocol under paragraph (d) of the noise condition, noise immissions at the location or locations where compliance measurements are being undertaken contain or are likely to contain a tonal component, a tonal penalty is to be calculated and applied using the following rating procedure.


(b) For each 10 minute interval for which $L_{A90,10 \text{ minute}}$ data have been determined as valid in accordance with Guidance Note 2 a tonal assessment shall be performed on noise immissions during 2 minutes of each 10 minute period. The 2 minute periods should be spaced at 10 minute intervals provided that uninterrupted uncorrupted data are available ("the standard procedure"). Where uncorrupted data are not available, the first available uninterrupted clean 2 minute period out of the affected overall 10 minute period shall be selected. Any such deviations from the standard procedure, as described in Section 2.1 on pages 104-109 of ETSU-R-97, shall be reported.

(c) For each of the 2 minute samples the tone level above or below audibility shall be calculated by comparison with the audibility criterion given in Section 2.1 on pages 104-109 of ETSU-R-97.

(d) The tone level above audibility shall be plotted against wind speed for each of the 2 minute samples. Samples for which the tones were below the audibility criterion or no tone was identified, a value of zero audibility shall be used.

(e) A least squares "best fit" linear regression line shall then be performed to establish the average tone level above audibility for each integer wind speed derived from the value of the "best fit" line at each integer wind speed. If there is no apparent trend with wind speed then a simple arithmetic mean shall be used. This process shall be repeated for each integer wind speed for which there is an assessment of overall levels in Guidance Note 2.

(f) The tonal penalty is derived from the margin above audibility of the tone according to the figure below.

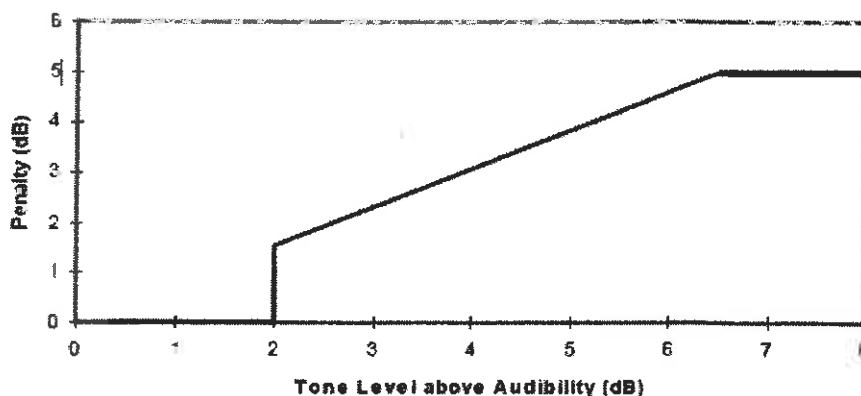

Guidance Note 4

(a) If a tonal penalty is to be applied in accordance with Guidance Note 3 the rating level of the turbine noise at each wind speed is the arithmetic sum of the measured noise level as determined from the best fit curve described in Guidance Note 2 and the penalty for tonal noise as derived in accordance with Guidance Note 3 at each integer wind speed within the range specified by the Local Planning Authority in its written protocol under paragraph (d) of the noise condition.

(b) If no tonal penalty is to be applied then the rating level of the turbine noise at each wind speed is equal to the measured noise level as determined from the best fit curve described in Guidance Note 2.

(c) In the event that the rating level is above the limit(s) set out in the Tables attached to the noise conditions or the noise limits for a complainant's dwelling approved in accordance with paragraph (e) of the noise condition, the independent consultant shall undertake a further assessment of the rating level to correct for background noise so that the rating level relates to wind turbine noise immission only.

(d) The wind farm operator shall ensure that all the wind turbines in the development are turned off for such period as the independent consultant requires to undertake the further assessment. The further assessment shall be undertaken in accordance with the following steps:

(e). Repeating the steps in Guidance Note 2, with the wind farm switched off, and determining the background noise (L_3) at each integer wind speed within the range requested by the Local Planning Authority in its written request under paragraph (c) and the approved protocol under paragraph (d) of the noise condition.

(f) The wind farm noise (L_1) at this speed shall then be calculated as follows where L_2 is the measured level with turbines running but without the addition of any tonal penalty:

$$L_1 = 10 \log \left[10^{L_2/10} - 10^{L_3/10} \right]$$

(g) The rating level shall be re-calculated by adding arithmetically the tonal penalty (if any is applied in accordance with Note 3) to the derived wind farm noise L_1 at that integer wind speed.

(h) If the rating level after adjustment for background noise contribution and adjustment for tonal penalty (if required in accordance with note 3 above) at any integer wind speed lies at or below the values set out in the Tables attached to the conditions or at or below the noise limits approved by the Local Planning Authority for a complainant's dwelling in accordance with paragraph (e) of the noise condition then no further action is necessary. If the rating level at any integer wind speed exceeds the values set out in the Tables attached to the conditions or the noise limits approved by the Local Planning Authority for a complainant's dwelling in accordance with paragraph (e) of the noise condition then the development fails to comply with the conditions.